

LT9611 --- Product Brief

2-Port MIPI to HDMI1.4 Converter

Features

● Dual-Port MIPI® DSI/CSI Receiver

- Compliant with D-PHY1.2 ,DSI1.2/CSI-2 1.00 and DCS 1.02.00
- 1~2 Configurable Port
- 1 Clock Lane and 1~4 Configurable Data Lanes
- 80Mb/s~2Gb/s per Data Lane
- Data Port ,Data Lane and Polarity Swapping
- Internal Rterm Calibration with Less than 5% Error
- Programmable Equalization
- Burst Mode and Non-Burst Mode Supported
- Dual Port Odd-Even Mode and Left-Right Mode Supported
- Support up to 24-bit RGB and YUV Data Format

● HDMI1.4 Transmitter

- Compliant with HDMI1.4 and HDCP1.4
- Resolution Up to 4K 30Hz
- Programmable output swing and pre-emphasis
- Fully hardware controlled or optional software controlled HDCP operations
- Integrated CEC controller
- Integrated EDID shadow RAM and embedded EDID
- 5V tolerance DDC/HPD I/Os
- Both AC-coupling and DC-coupling Supported

● Miscellaneous

- 1.8V and 3.3V Power Supply
- Support 100KHz and 400KHz I2C Slave
- Support MIPI DCS Config

- Support up to 8-CH SPDIF/I2S Audio Input
- Embedded EEPROM for firmware HDCP keys optionally
- Temperature Range: -40°C ~ +85°C
- 64-pin QFN 7.5*7.5 package

Description

The LT9611 MIPI® DSI/CSI to HDMI1.4 bridge features a dual-port MIPI® D-PHY receiver front-end configuration with 4 data lanes per port operating at 2Gbps per data lane and a maximum input bandwidth of 16Gbps.

The bridge provides a HDMI data output with optional S/PDIF or 8-channel I2S serial audio input. Its high fidelity 8-channel I2S can transmit stereo up to a 192kHz sampling rate. The S/PDIF can carry stereo LPCM audio or compressed audio, including Dolby® Digital and DTS®. The LT9611 is fabricated in advanced CMOS process and implemented in a small outline 7.5mm x 7.5mm QFN64 package. This package is RoHS compliant and specified to operate from -40°C to +85°C.

Applications

- Mobile systems
- Cellular handsets
- Digital video cameras
- Digital still cameras
- Personal media players
- Gaming
- Camera systems

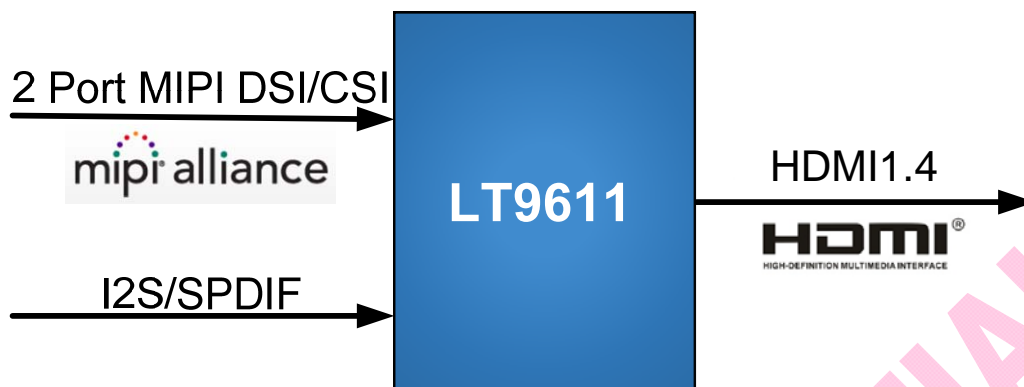


Figure 1. LT9611 Typical Application Diagram

Ordering Information

Table 1. Ordering Information

Part Number	Operating Temperature Range	Package	Packing Method
LT9611	-40°C to +85°C	QFN64 (7.5*7.5)	

Copyright © 2017 Lontium Semiconductor Corporation, All rights reserved.

Lontium Semiconductor Proprietary & Confidential

This document and the information it contains belong to Lontium Semiconductor. Any review, use, dissemination, distribution or copying of this document or its information outside the scope of a signed agreement with Lontium is strictly prohibited.

LONTIUM DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THOSE OF NONINFRINGEMENT, MERCHANTABILITY, TITLE AND FITNESS FOR A PARTICULAR PURPOSE. CUSTOMERS EXPRESSLY ASSUME THEIR OWN RISK IN RELYING ON THIS DOCUMENT.

LONTIUM PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS WHERE A MALFUNCTION OF A LONTIUM DEVICE COULD RESULT IN A PERSONAL INJURY OR LOSS OF LIFE.

Lontium assumes no responsibility for any errors in this document, and makes no commitment to update the information contained herein. Lontium reserves the right to change or discontinue this document and the products it describes at any time, without notice. Other than as set forth in a separate, signed, written agreement, Lontium grants the user of this document no right, title or interest in the document, the information it contains or the intellectual property in embodies.

Trademarks

Lontium™ 龙迅™ and ClearEdge™ is a registered trademark of Lontium Semiconductor. All Other brand names, product names, trademarks, and registered trademarks contained herein are the property of their respective owners.

Visit our corporate web page at: www.lontiumsemi.com

Technical support: support@lontium.com

Sales: sales@lontium.com